


Knauf Designed Ceilings

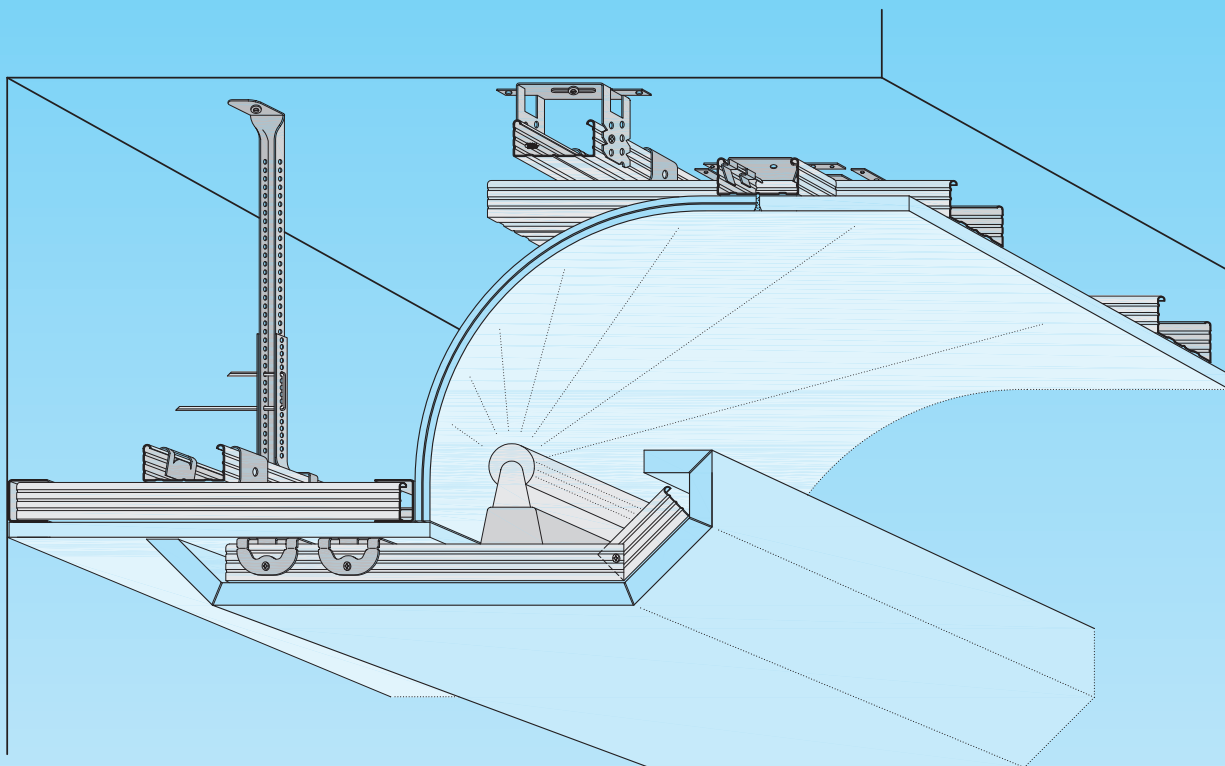

NEW! Knauf Multi Connector for CD 60x27 - for Angled Connections, Split Level Ceilings, Connection Joints, Longitudinal Channel Connections

D191 Knauf Mitering Technology

D192 Knauf Molding Technology

D193 Knauf Domes

The structural, static properties, and characteristic building physics of Knauf systems can solely be ensured with the exclusive use of Knauf system components, or other products expressly recommended by Knauf.

KNAUF

Knauf Mitered Boards

Miter cuts	
30°	45°
60°	75°
90°	120°

Board thickness
9.5 mm to 25 mm

Board length
max. 3 m


Pre-treatment
Prime miters with Knauf Tiefengrund and glue with Knauf Weißleim (PVA)

Other board thicknesses or factory glued/partially glued boards on request

Necessary order information:

Version-No. (e.g. 1)

dimensions and marking of the face side

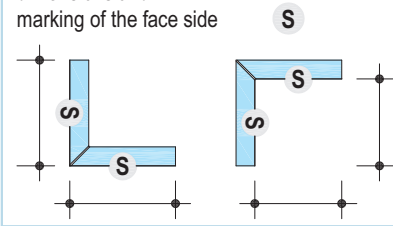


Examples: Knauf Mitered Boards


 1x 90° miter 1	 1x 90° miter 2	 1x 90° miter 3	 1x 90° miter 4
 2x 90° miters 5	 2x 90° miters 6	 2x 90° miters 7	 1x 45° + 1x 90° miters 8
 2x 60° miters + board strip 9	 3x 90° miters 10	 3x 90° miters 11	
 4x 90° miters 12	 2+2 90° miters 13	 2+2 90° miters 14	
 2+1 90° miters 15	 2+1 90° miters 16	 3+2 90° miters 17	

Knauf Mitered Boards


Details: Examples

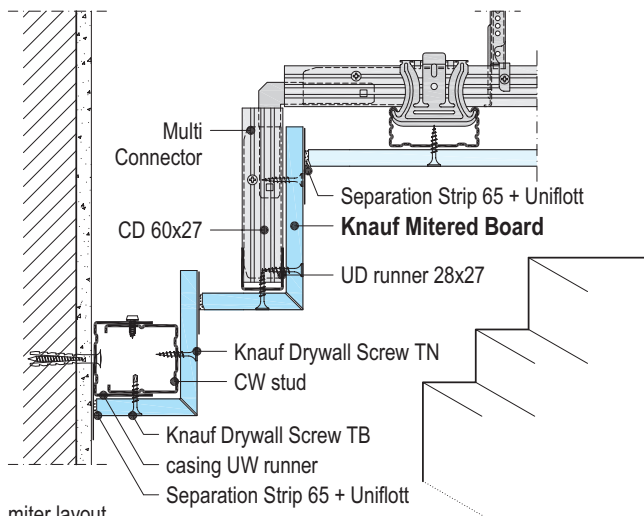


D191-S1 Cornice

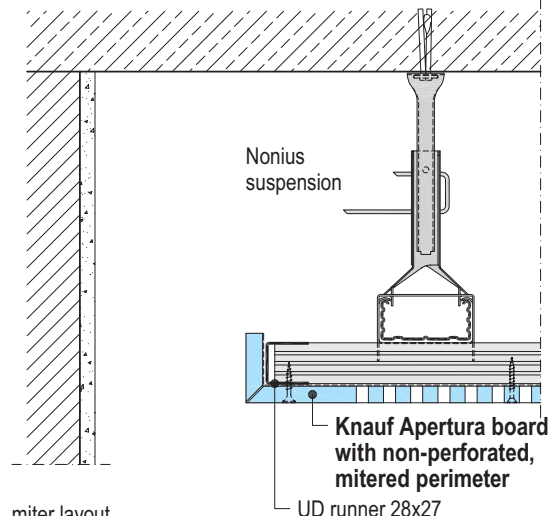


D191-S2 Canopy

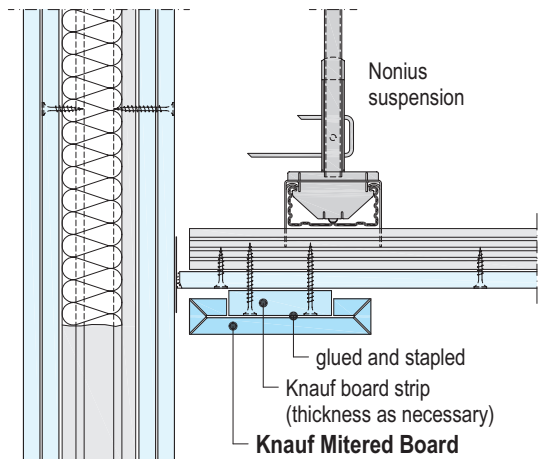


D191-S3 Crown Frieze

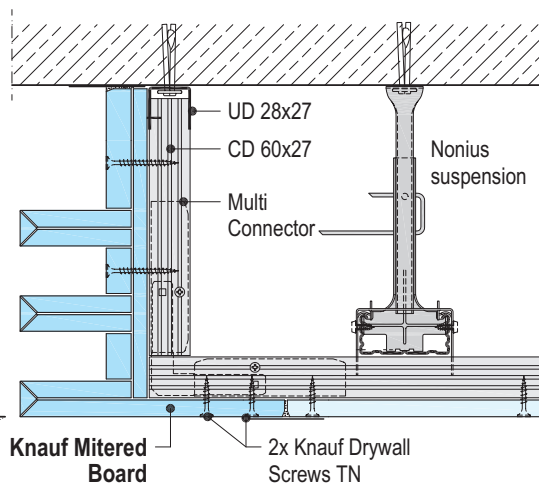


D191-S4 Horizontal Fins

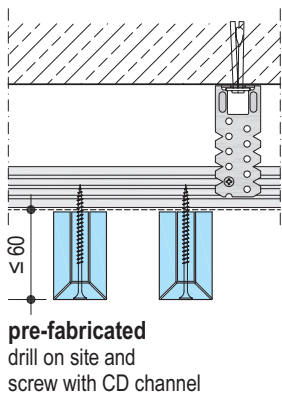

D191-S5 Vertical Fins

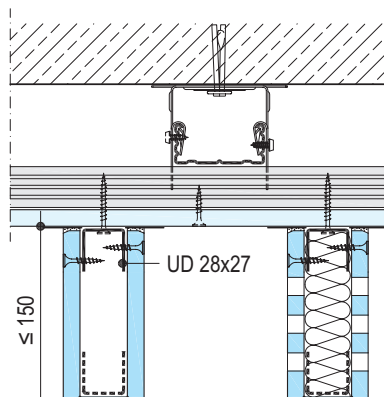


D191-S6 Baffle

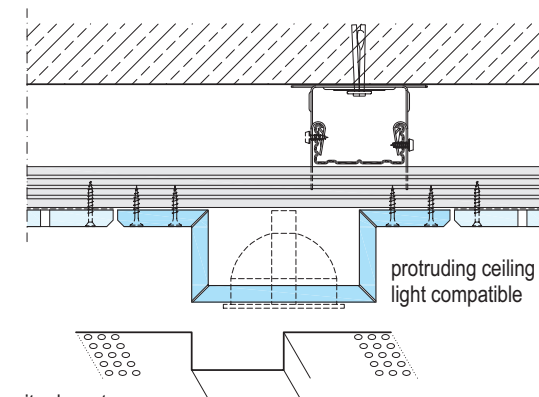



D191-S7 Protruding

Knauf Mitered Boards



Details: Examples

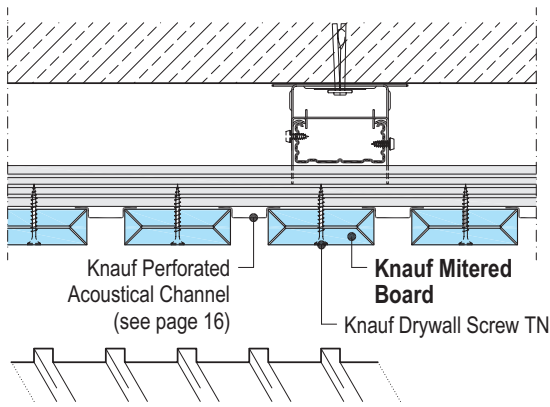


D191-S8 Panel Ceiling

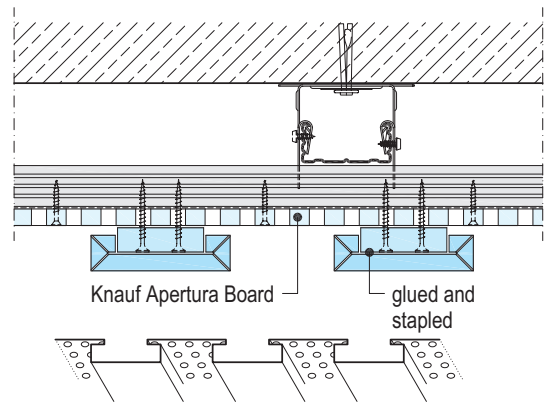


D191-S9 Module Ceiling

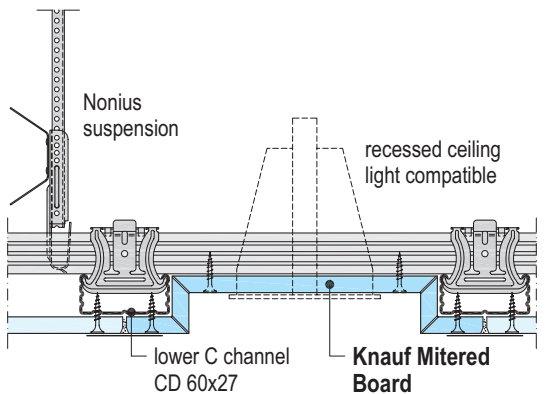


D191-S10 Recessed

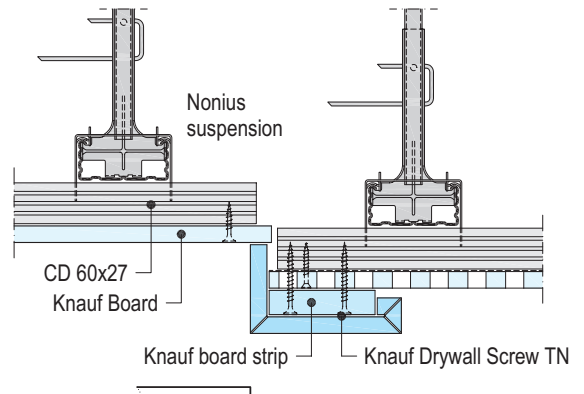

D191-S11 Split Level Ceiling with Frieze

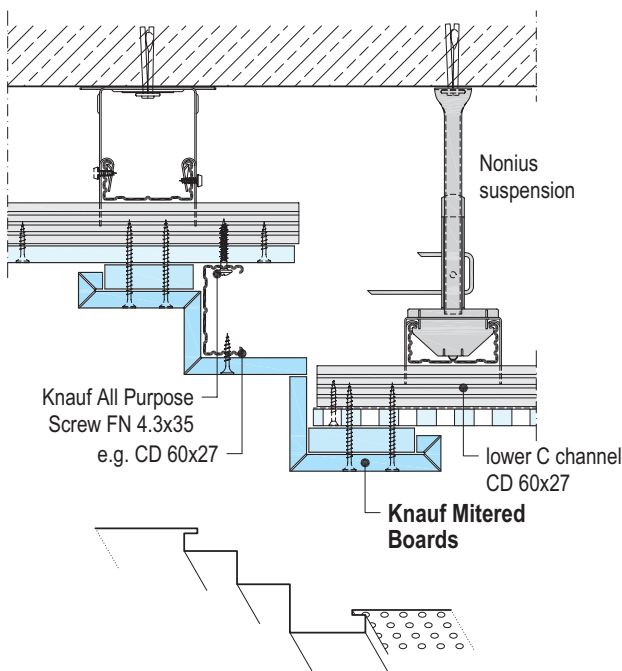


D191-S12 Split Level Ceiling with Steps

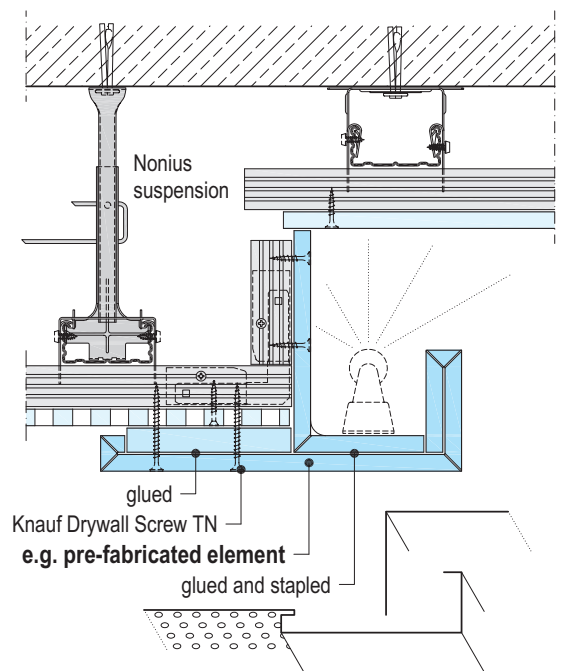

D191-S13 Split Level Ceiling with Indirect Illumination


Knauf Mitered Boards

Details: Examples

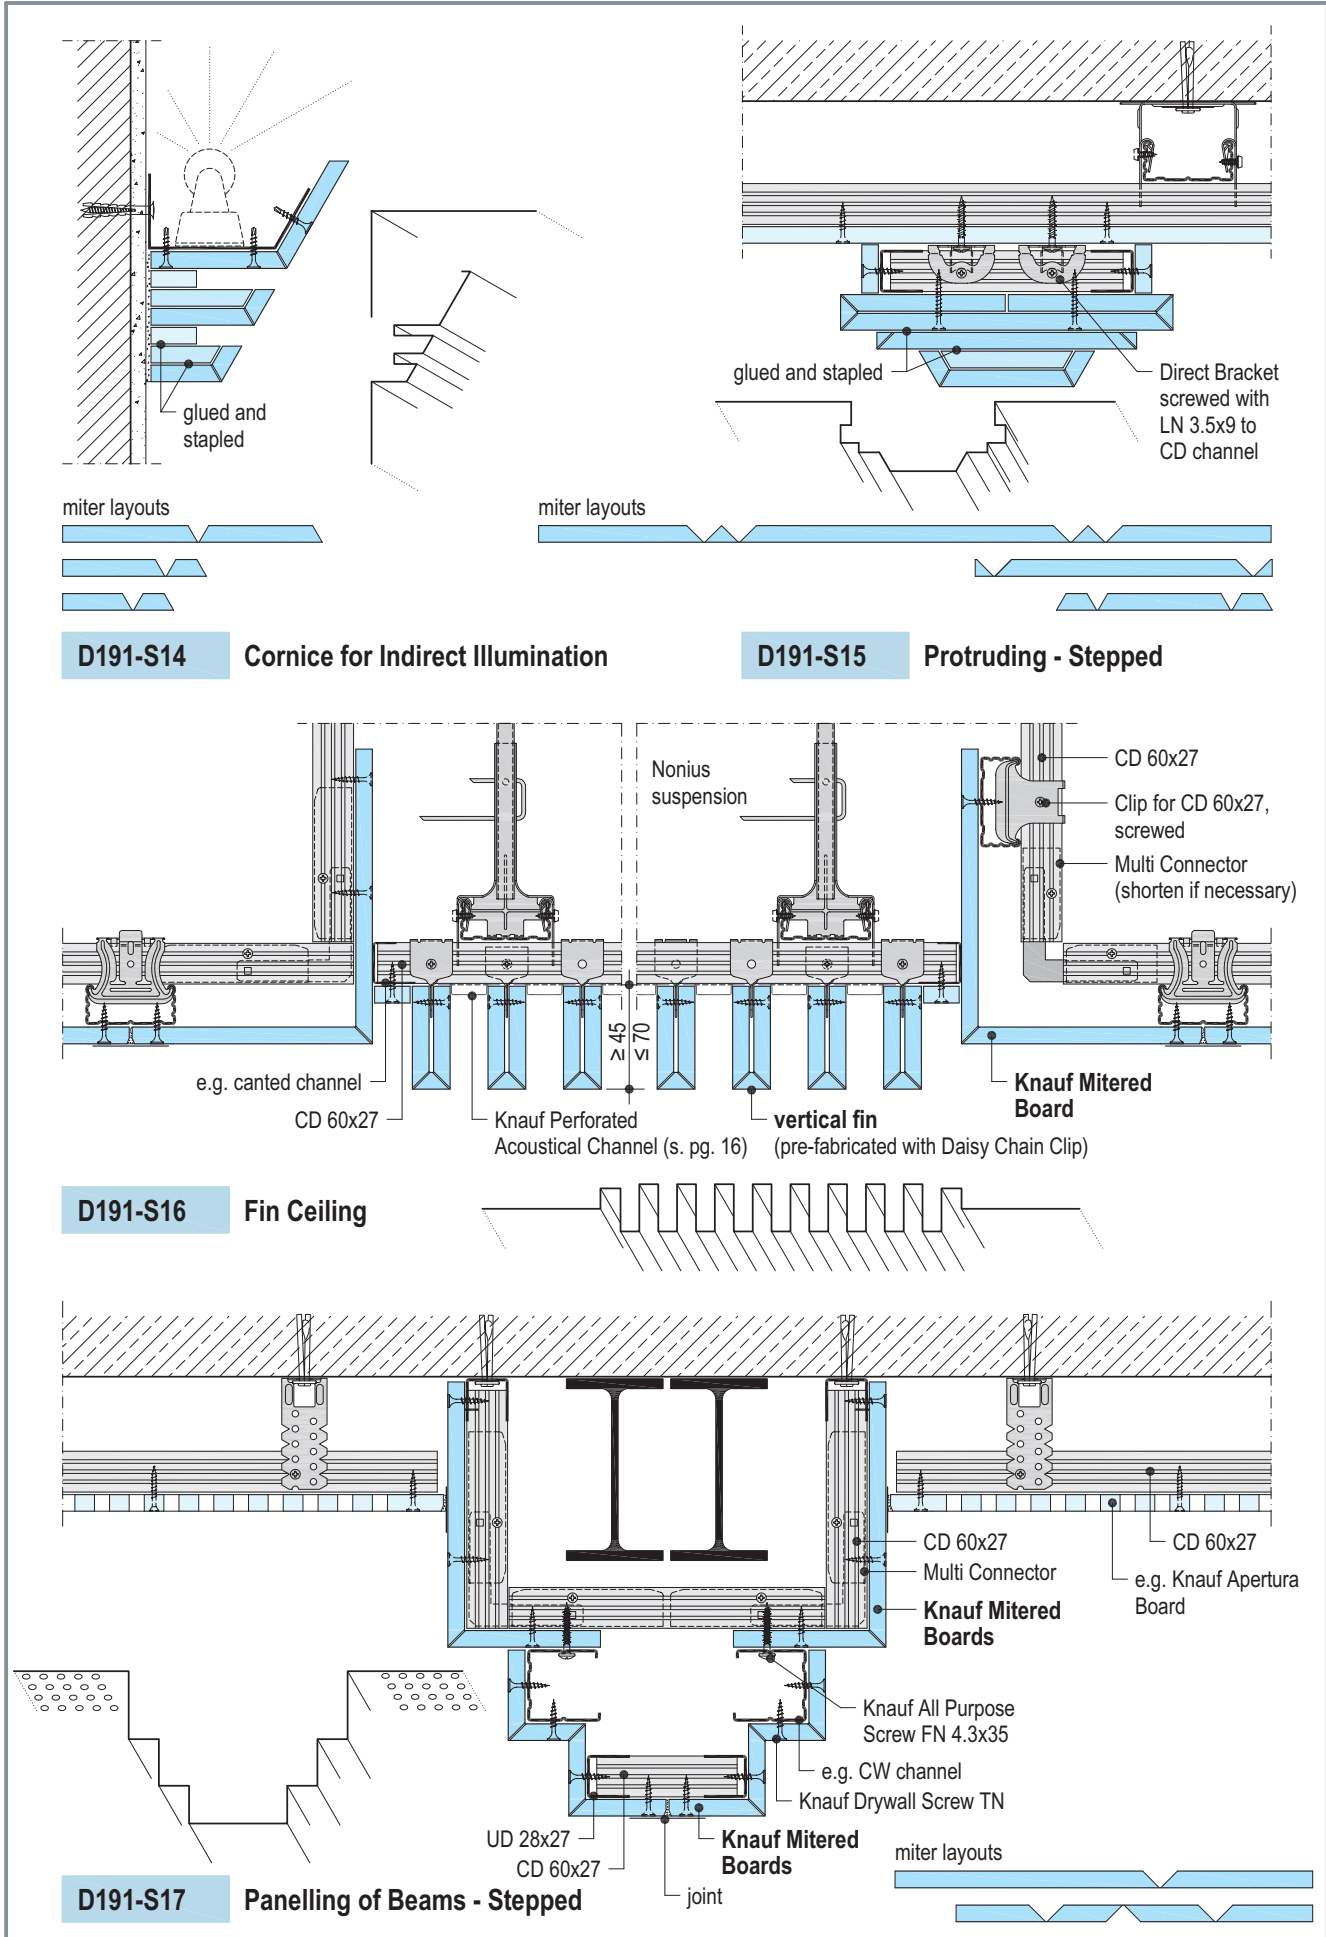


Knauf Mitered Boards



Details: Cornice Construction

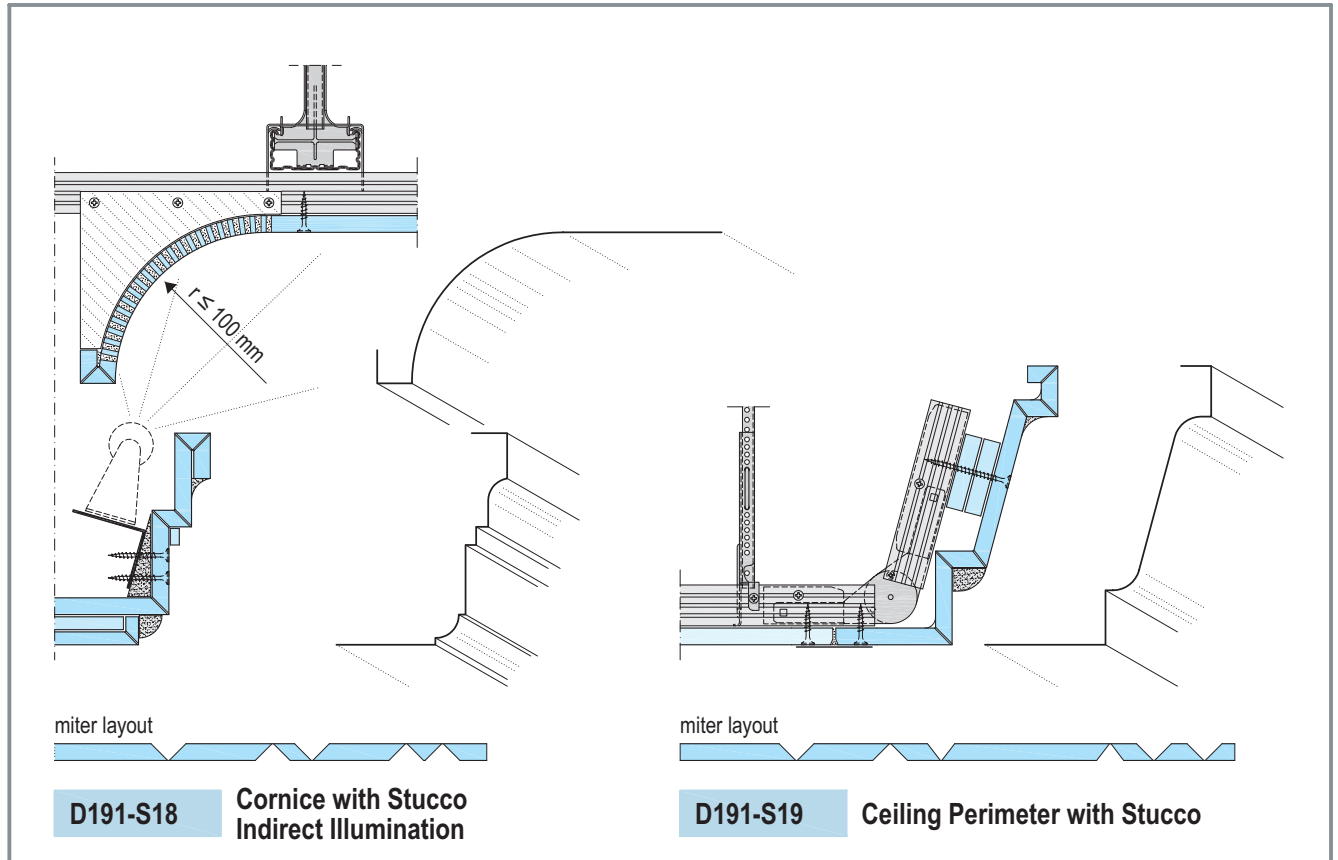






Detail: Column Capital

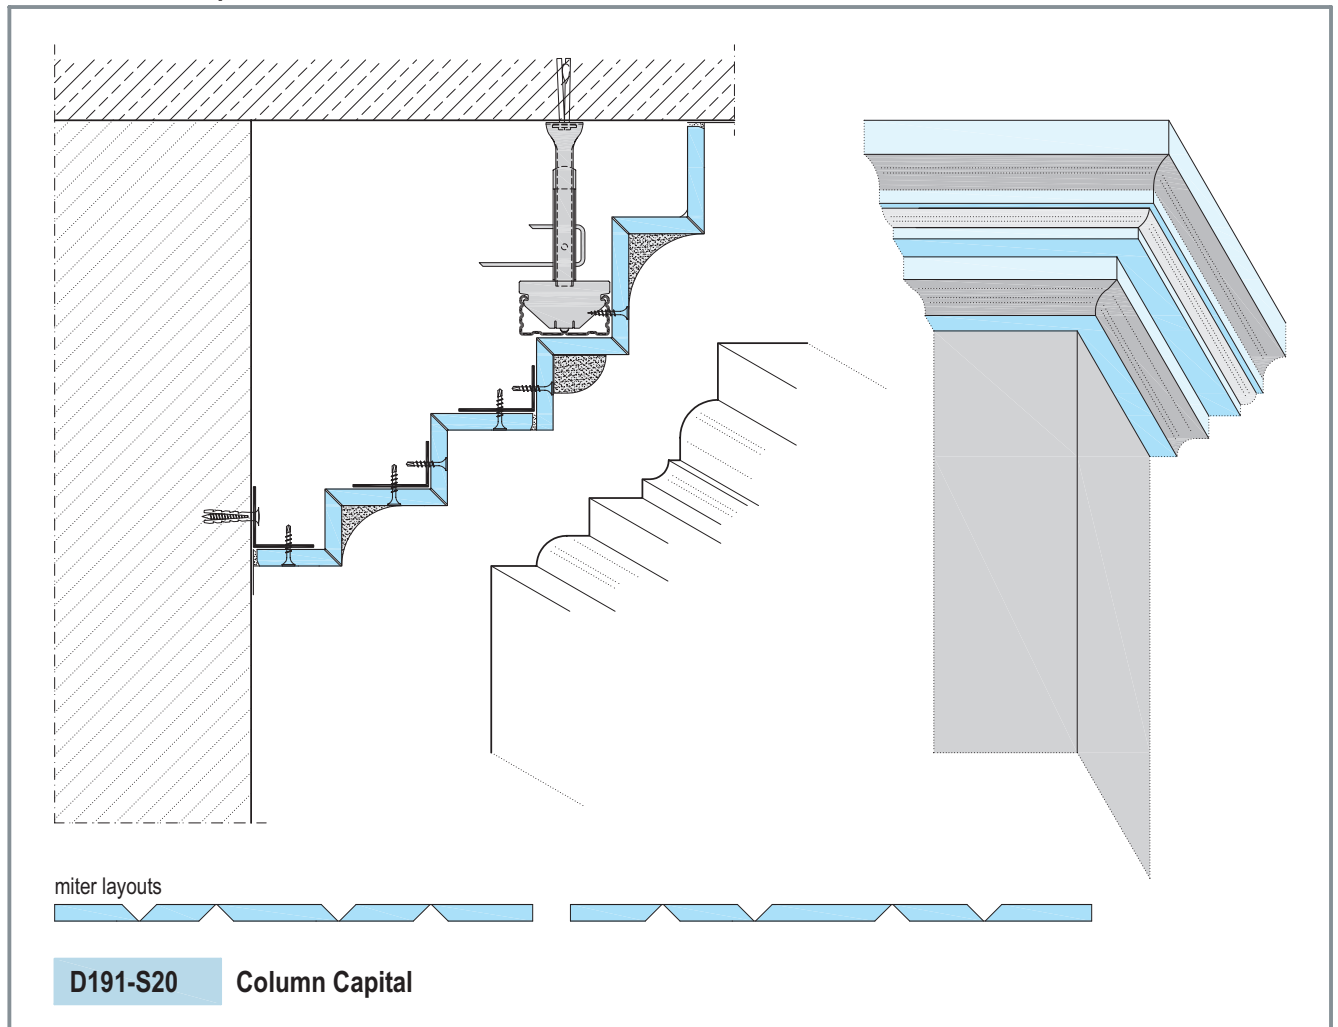


Factory Molded

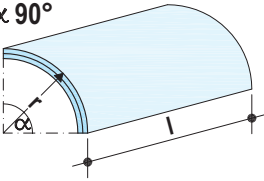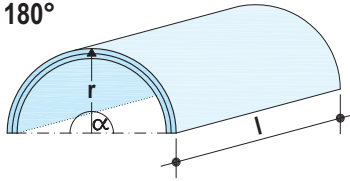Length of elements l		Thickness of elements d	
$\alpha 90^\circ$ 	$\alpha 180^\circ$ 	element mm molding boards mm	
length l max. 3480 mm (r ≤ 700 mm) length l max. 1150 mm (r ≥ 700 mm)	length l max. 3480 mm (r ≤ 350 mm) length l max. 1150 mm (r ≥ 350 mm)	12 2x 6 18 3x 6 24 4x 6	
		Other dimensions on request	
		<ul style="list-style-type: none"> • radius r : ≥ 100 mm • angle α : ≤ 180° 	

Arch Versions: Examples

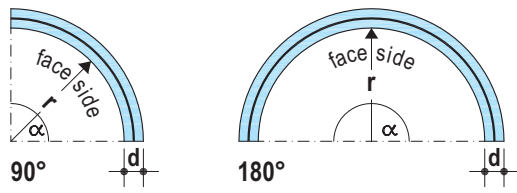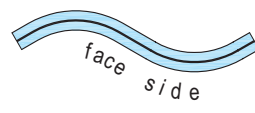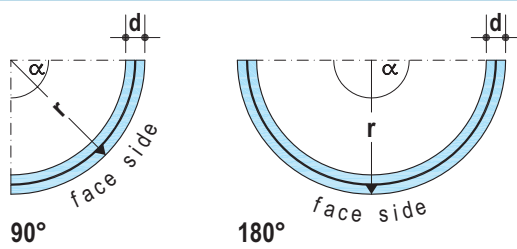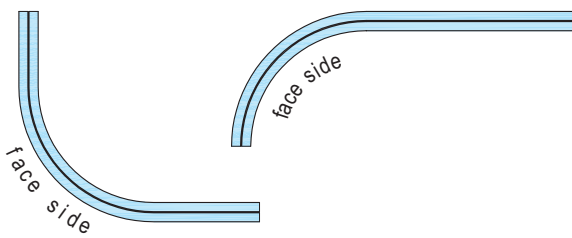Concave Inside Arches	S Arch	Segment Arch	
			
Convex Outside Arches	Arches with Extensions		
			
length of layout L max. length of layout 3480 mm, depending on radius and thickness of cladding	<ul style="list-style-type: none"> • angle α 90°: $L = \frac{r \cdot \pi}{2}$ 	<ul style="list-style-type: none"> • angle α 180°: $L = r \cdot \pi$ 	<ul style="list-style-type: none"> • all angles up to α 180°: $L = \frac{\alpha \cdot r \cdot \pi}{180}$


Detail: Example

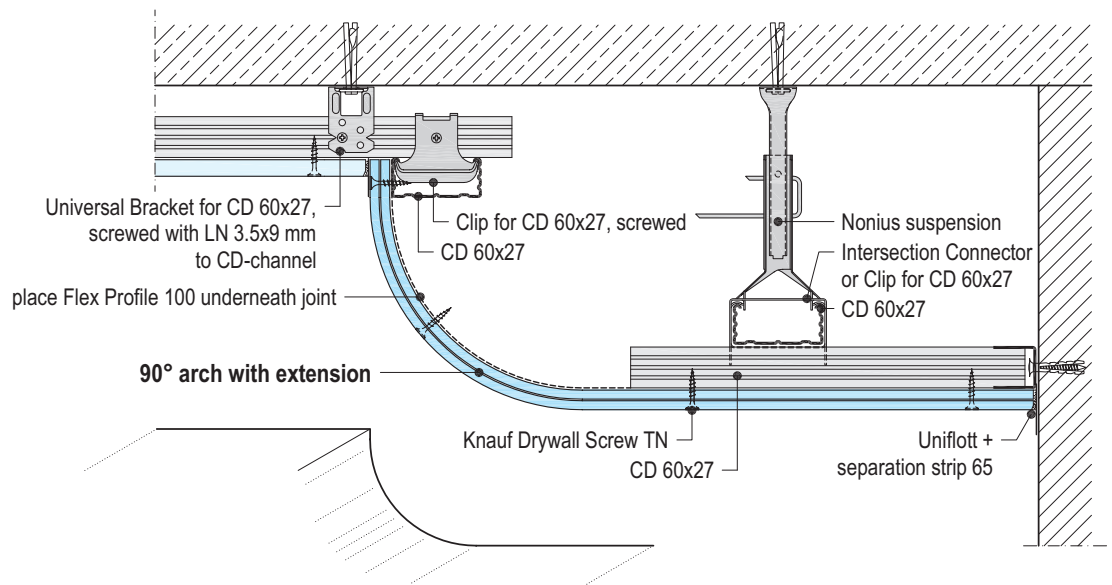



D192-S2 Split level Ceiling: Convex 90° Arch

Factory Molded


Details: Examples

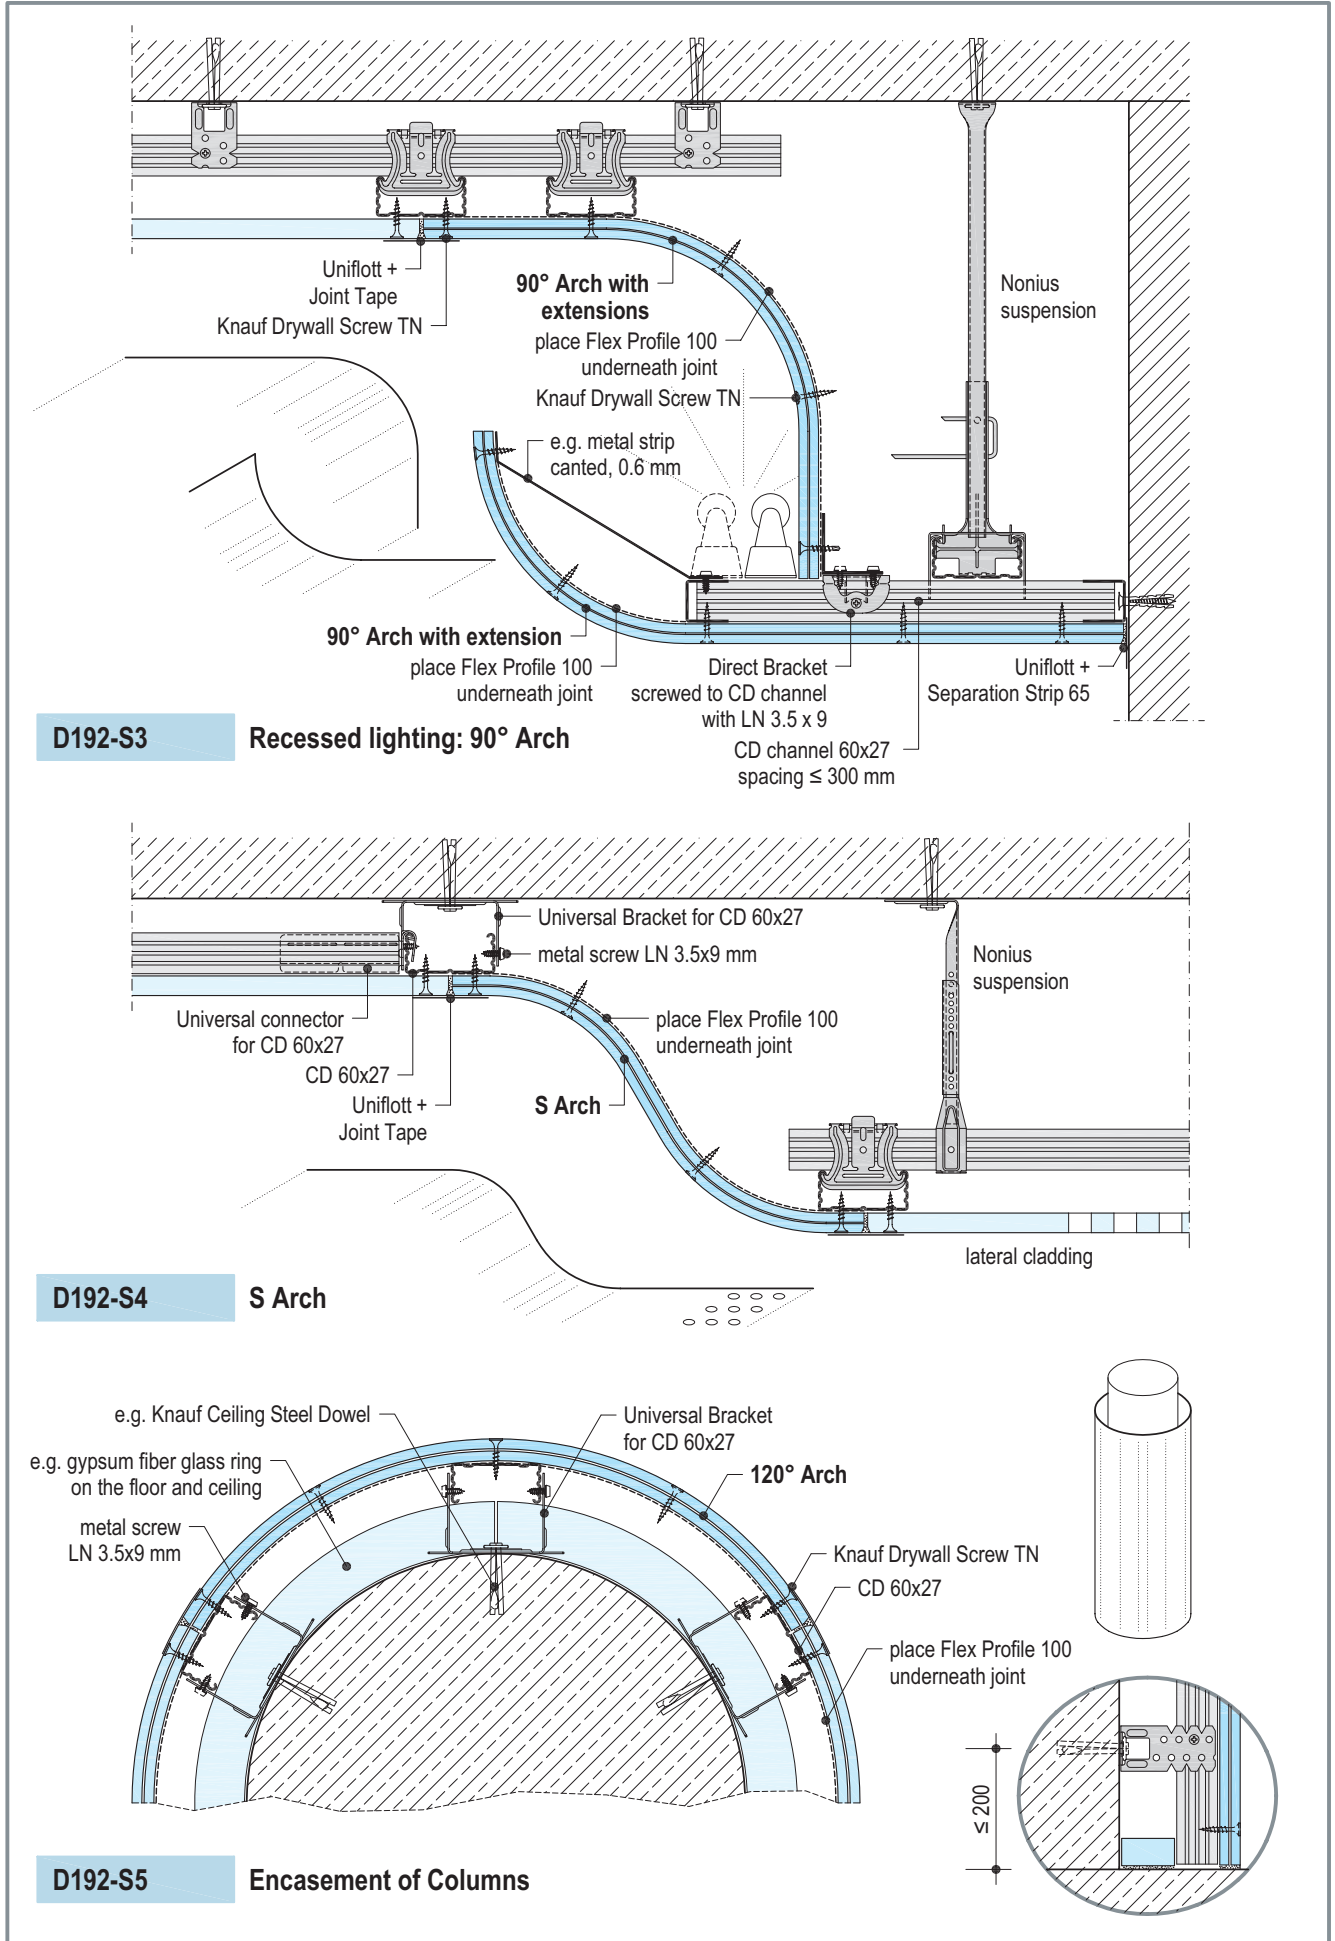

Molded On Site

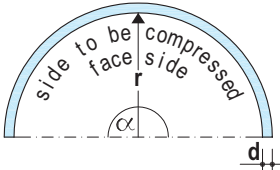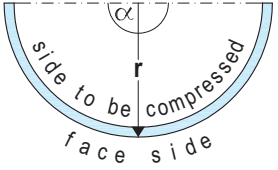
Inside Arch - Concave	Outside Arch - Convex	Board thickness d mm	Bending radius r dry bending mm	wet bending mm	Length of layout L
		6.5 (Mold Board)	≥ 1000	≥ 300	<ul style="list-style-type: none"> • angle α 90° $L = \frac{r \cdot \pi}{2}$ • angle α 180° $L = r \cdot \pi$ • all angles up to α 180° $L = \frac{\alpha \cdot r \cdot \pi}{180}$
		9.5	≥ 2000	≥ 500	
		12.5	≥ 2750	≥ 1000	
longitudinal bending only					

Bending instruction

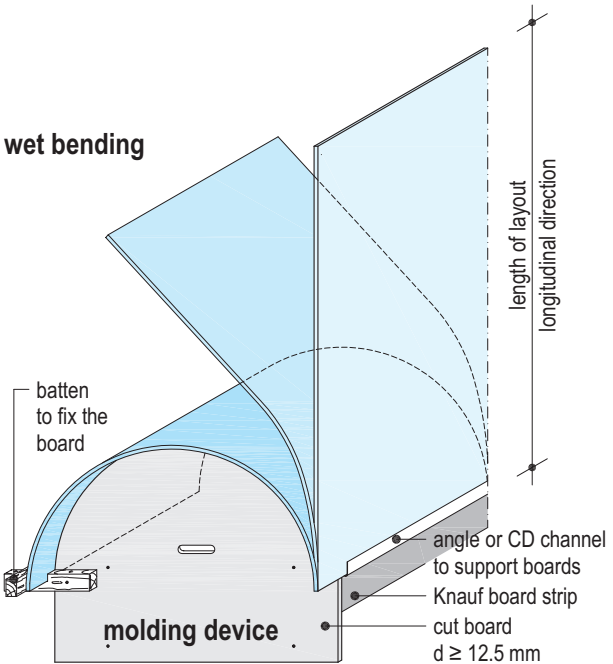

Wet bending


1. Put the cut-to-length Knauf Boards on a grid made of channels or similar with the side to be compressed on top and excessing the grid on the perimeters (so excess water can drip off).
2. Perforate the board laterally and longitudinally with Spike Roller.
3. Wet the board by spraying or with lambskin roller and let settle for a few minutes. Repeat process until excessive water drains.
4. Lay board on precast molding device, fix with tape and let dry.

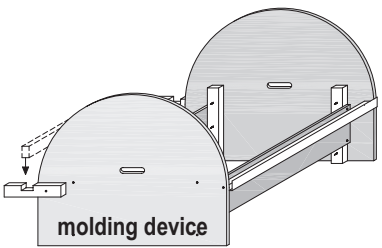

Dry bending

1. Bend Knauf Boards over metal grid or frame, fix with Knauf drywall screws.

Detail: Example Wet Bent



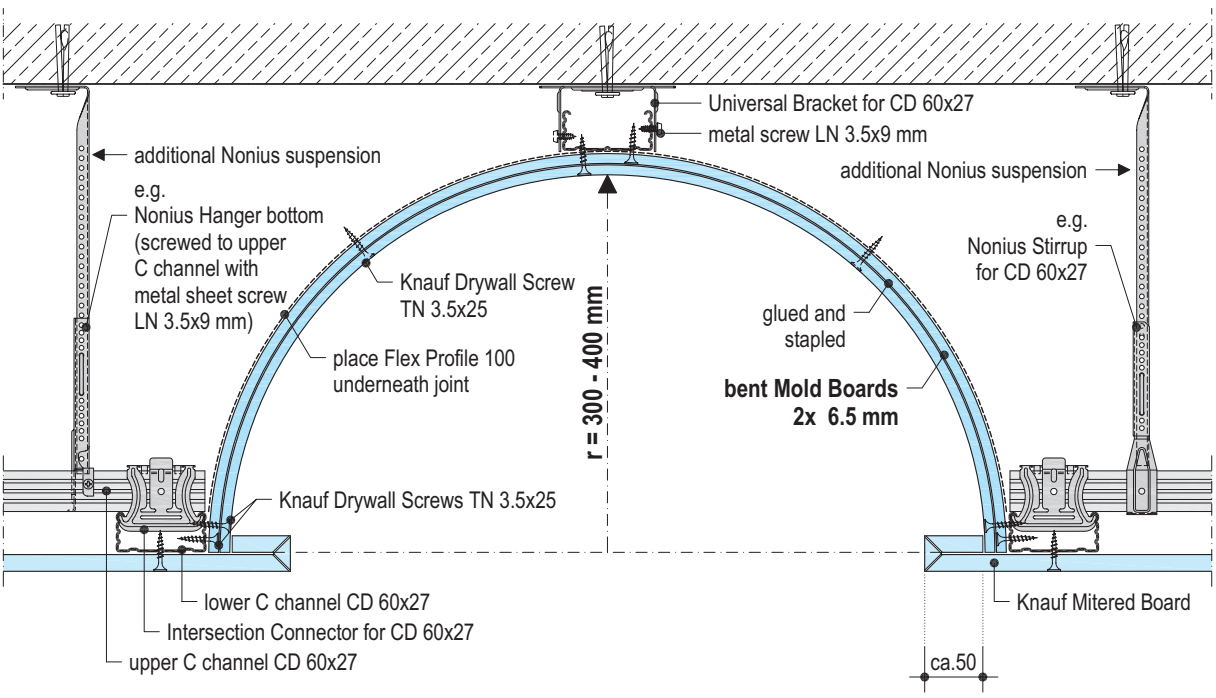


D192-S1 **Concave Barrel Vault with Knauf Molded Boards**






Parallel Slotting

D192



Molded On Site

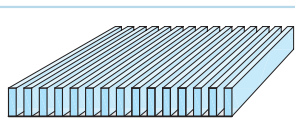
Concave Inside Arch	Convex Outside Arch	Board thickness	Board length	Length of layout L
		9.5 mm / 12.5 mm Other board thicknesses on request	max. 2.5 m	<ul style="list-style-type: none"> angle $\alpha < 90^\circ$ $L = \frac{r \cdot \pi}{2}$ angle $\alpha < 180^\circ$ $L = r \cdot \pi$ all angles up to $\alpha < 180^\circ$ $L = \frac{\alpha \cdot r \cdot \pi}{180}$
radius $r \geq 50$ mm				

Application

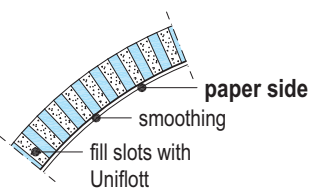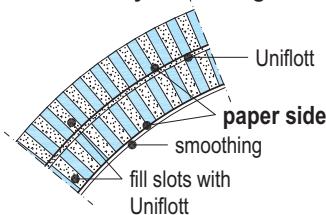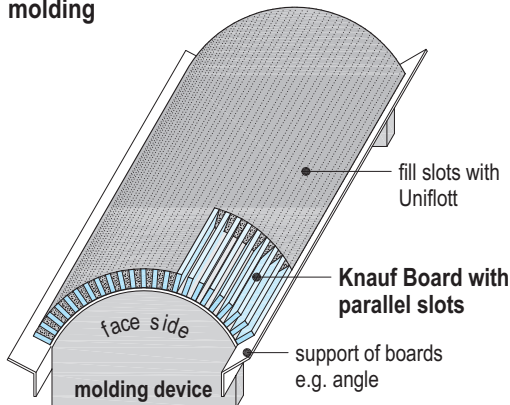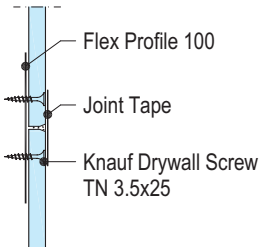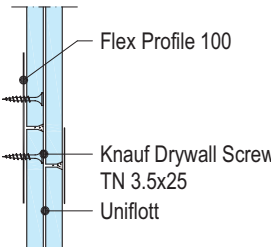single layer cladding	double layer cladding	molding
		
metal sheet covering of edge joints		
		<ol style="list-style-type: none"> Place board on precast molding device, face side up, bulk fill with Uniflott and plane down. After drying skim whole face side area with Uniflott.

Details: Examples

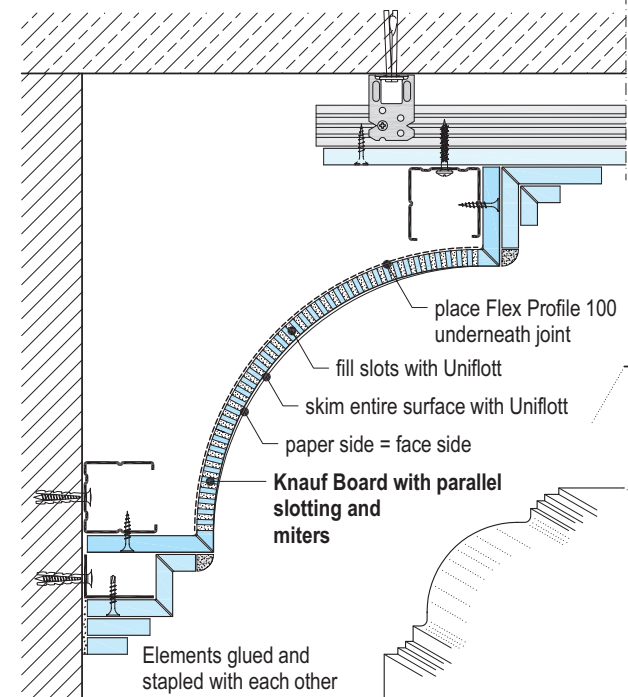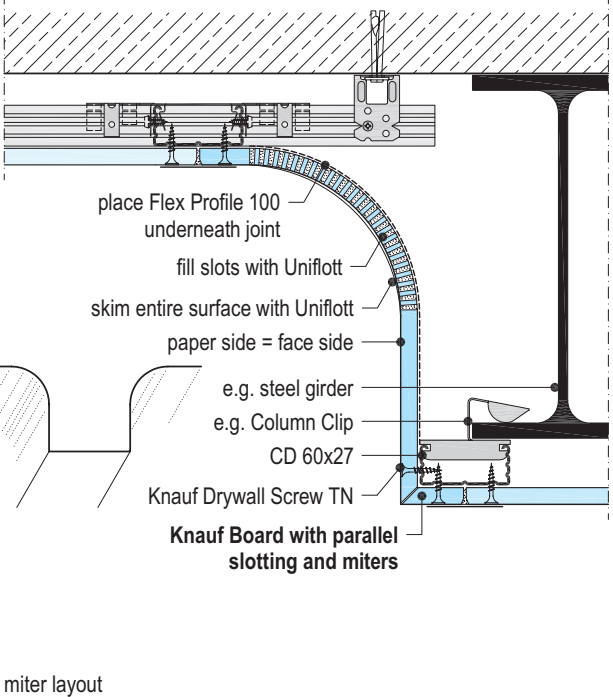	
D192-S7 Rounded Cornice	D192-S8 Encasement of Girder

miter layout 

Note

Factory molded elements made of Knauf Boards with parallel slotting on request

Factory-Bent

Concave min. bending radius 500 mm

Convex min. bending radius 1000 mm



• standard lengths of bent CD channels: 2600 / 3100 / 4000 mm

• start and end sections are not bent on either side for 150 mm

Bent CD channel

• radius r_1

$$r_1 = r + d + 27$$

• length of layout L_1

$$L_1 = \frac{\alpha \cdot r_1 \cdot \pi}{180}$$

r_1 = radius of bent CD channel


r = radius of Knauf Board face side

d = thickness Knauf Board

Face side Knauf Board

• radius r

$$r = \frac{h}{2} + \frac{B^2}{8h}$$




• length of layout L

$$L = \frac{\alpha \cdot r \cdot \pi}{180}$$

• alternative approximate formula arc length

$$L = \sqrt{B^2 + \frac{16}{3} \cdot h^2}$$



radius r
Knauf Board
mm

axial spacing
lower C channels b
mm

1000 - 2500


≤ 300

2500 - 5000

≤ 400

≥ 5000

≤ 500

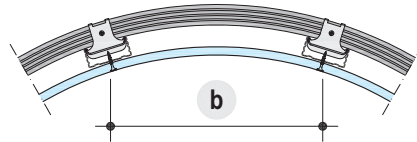

Detail: Example

Detail A

Detail B

Detail C

skim transition widely Uniflott + Joint Tape LB 3.5x9.5 UD runner connect before application UD 28x27 not fixed to the wall Uniflott + Separation Strip 65


Flat Dome Munich (München)

rise of cladding	-h-	358.5 mm
diameter of cladding	-d-	2600 mm
radius of cladding	-r-	2536 mm
number of drawing		34501-TV/D19

Flat Dome Berlin

rise of cladding	-h-	235 mm
diameter of cladding	-d-	2132 mm
radius of cladding	-r-	2536 mm
number of drawing		34502-TV/D19

- dome surface area F
 $F = 2 \cdot \pi \cdot r \cdot h$
- rise h
 $h = r - r'$
- calculation of r'
 $r' = \sqrt{r^2 - \left(\frac{d}{2}\right)^2}$




Included in delivery: kit for flat domes Berlin or Munich (München)


- **metal grid**
Complete (except Nonius suspension / thread rod with necessary screwing), drawing (e.g. no. 34502-TV/D19) and instruction
- **cladding:**
Complete cladding (Knauf board strips 12.5 mm and board segments 9.5 mm)

Suspension

suspender for square tube 20/20
(delivery unbent)




with
Nonius Suspension Stud or thread rod M6
+ Nonius Hanger top




Channel connection

square tube CD channel connector
(delivery attached to square tube)




Flush Connector
connection of CD channels at vertex




Dome: Example

scheme drawings - no scale



• suspensions




• detail: vertex construction



• detail: channel connection

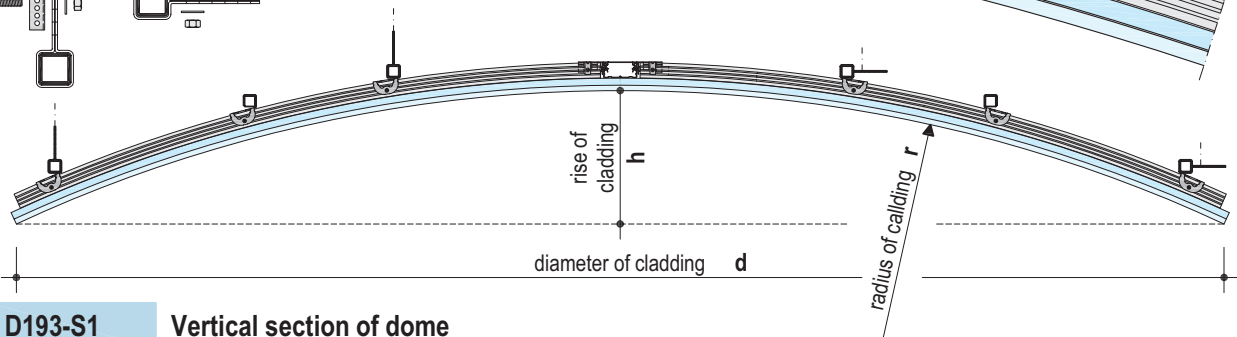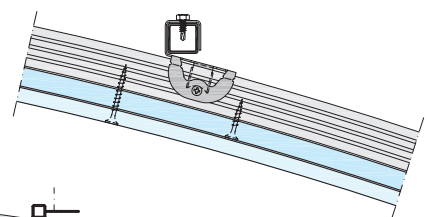

D193-S1 Vertical section of dome

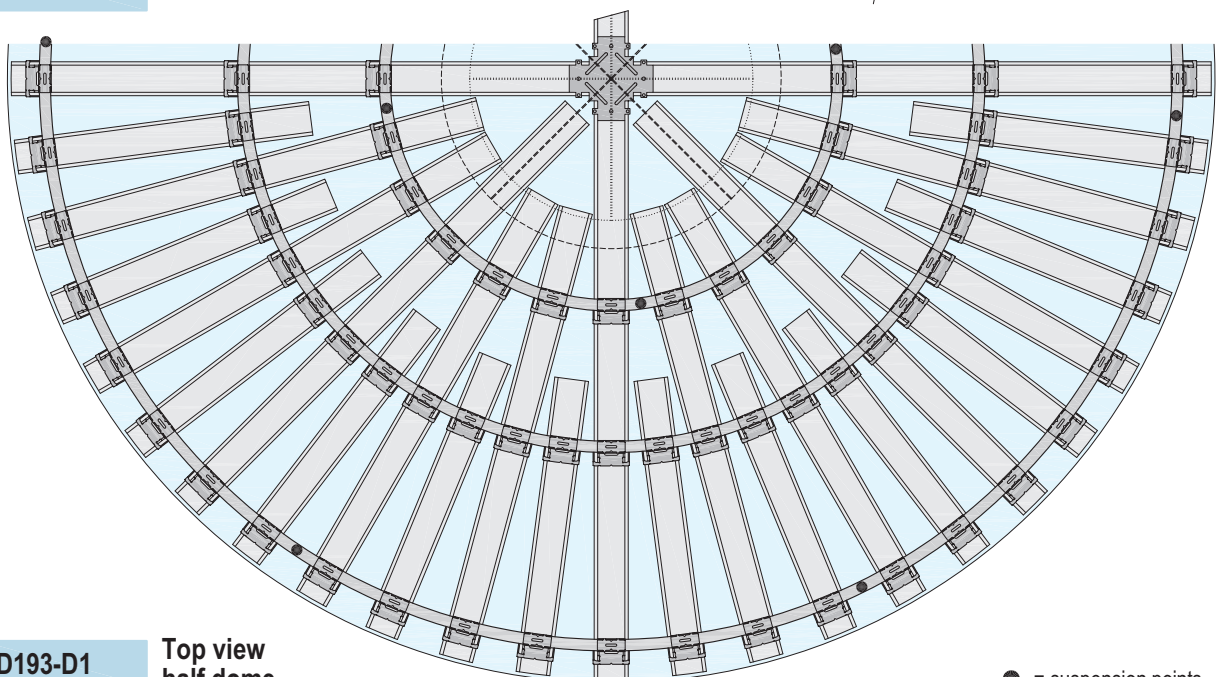


D193-D1 Top view half dome


● = suspension points

Examples


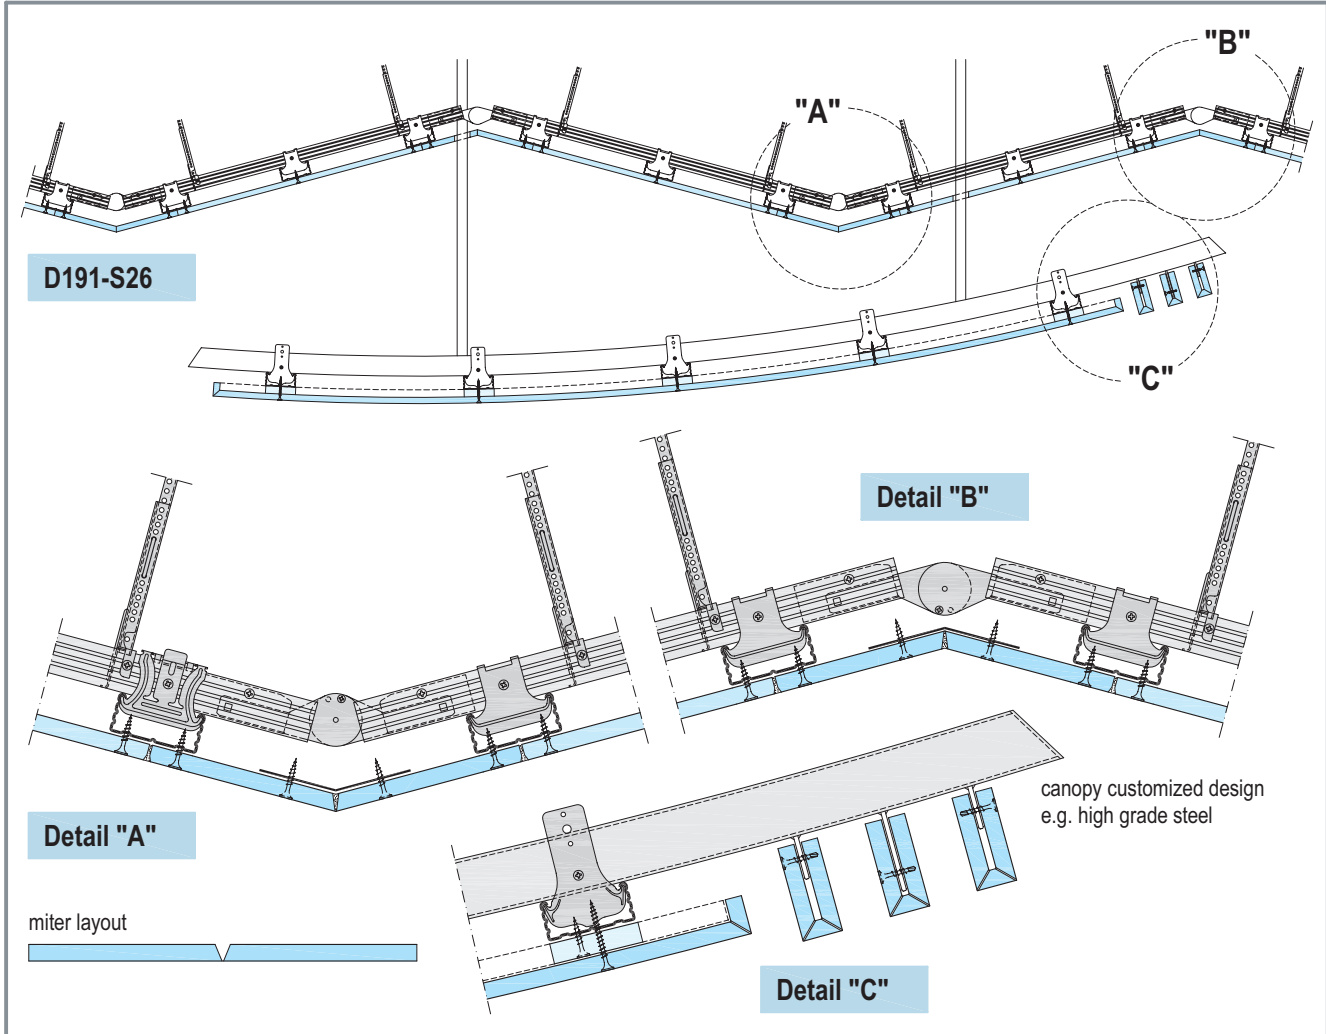




Mitered Ceiling with Suspended Canopy-Type Ceiling Unit

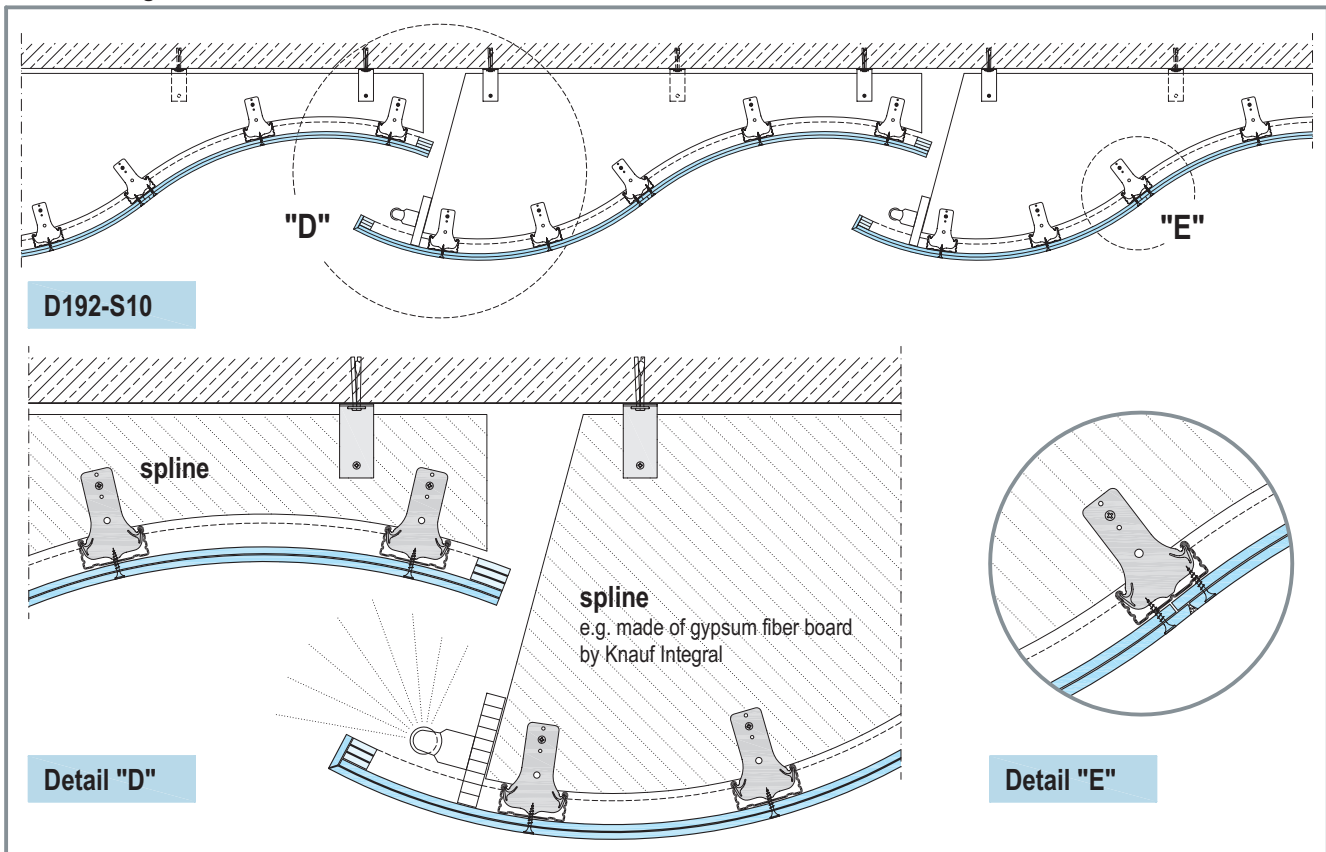

Wave Ceiling



Multi Connector for CD 60x27


Multi Connector	Multi Connector Adaptor				
	<ul style="list-style-type: none"> • Adaptor 90° 	<ul style="list-style-type: none"> • Adaptor 135° 	<ul style="list-style-type: none"> • Adaptor Z 12.5 	<ul style="list-style-type: none"> • Adaptor 30° - 280°  <p>fix with LN 3.5x9</p>	<ul style="list-style-type: none"> • Adaptor for other fixed angles on request (e.g. 120°) 

Assembly


- angled connection
- connection joint

connect Multi Connector to Adaptors, **Adaptors should lock in place**, push angled connection into CD channel and fix with screw


Multi Connector can be shortened with metal shears



fix Multi Connector to each CD channel with 2 Knauf Drywall Screws TN 3.5x25

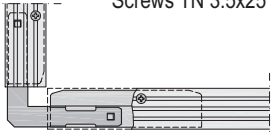

Fire protection from above
the whole angled connection (Adaptor, CD channel, Multi Connector) shall be fixed with 2 Knauf Drywall Screws TN 3.5x25 to each CD channel

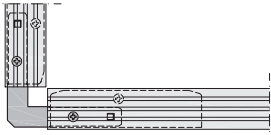


- longitudinal connection - 2 CD channels


Push Multi Connector into CD channel up to stopper (shortening is not allowed)

Examples of Use (scheme drawings)


- angle 90°
2x Multi Connector
2x Adaptor 90°

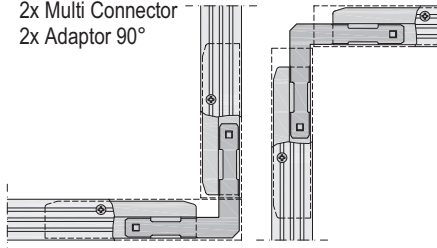


- angle 90° with cantilever
2x Multi Connector
2x Adaptor 90°

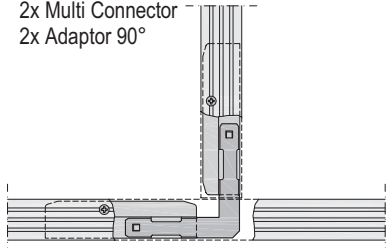


- angle 45° or 135°
2x Multi Connector
2x Adaptor 135°

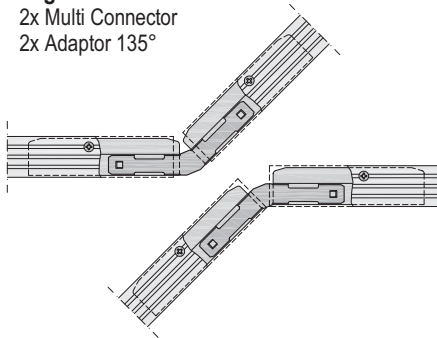

- angle adjustable 30° to 280°
2x Multi Connector
2x Adaptor 30° to 280°

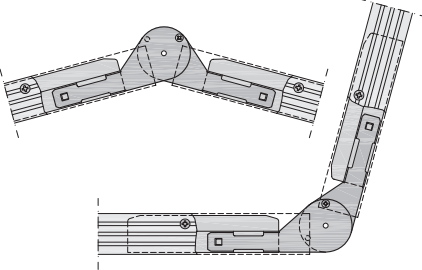


- split level ceiling 90°
3x Multi Connector
4x Adaptor 90°

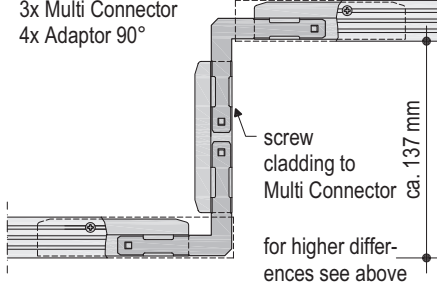


screw cladding to Multi Connector ca. 137 mm
for higher differences see above

- connection joint, 12.5 mm cladding
2x Multi Connector
2x Adaptor Z 12.5

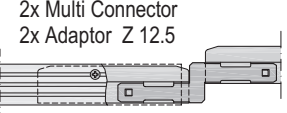


- longitudinal connection: 2 CD channels
1x Multi Connector




joint of channels (at stopper)

Details: Examples

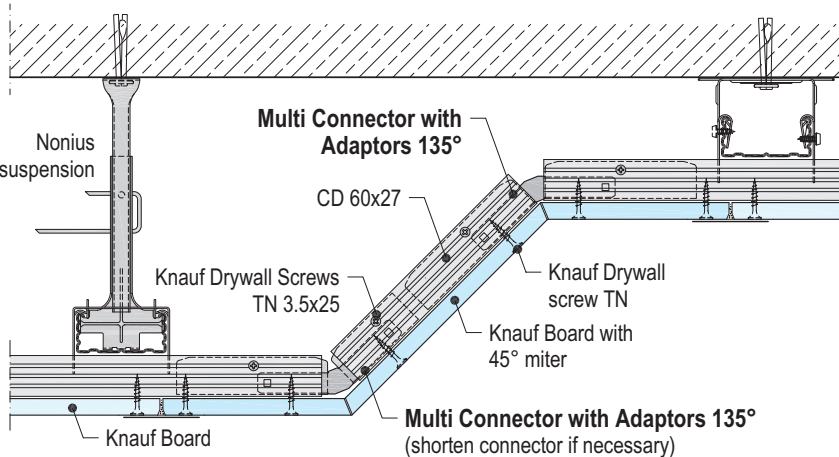

D191-S21 Split Level Ceiling 45°

Labels: Nonius suspension, Multi Connector with Adaptors 135°, CD 60x27, Knauf Drywall Screws TN 3.5x25, Knauf Board with 45° miter, Multi Connector with Adaptors 135° (shorten connector if necessary), Knauf Board, Knauf Drywall screw TN

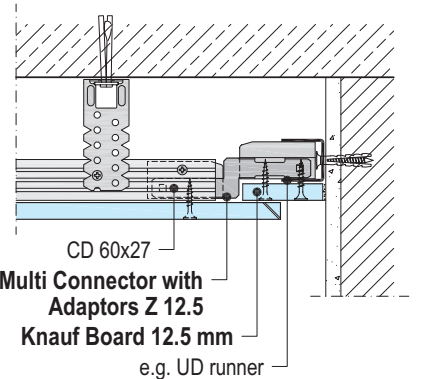

D191-S27 Connection Joint

Labels: CD 60x27, Multi Connector with Adaptors Z 12.5, Knauf Board 12.5 mm, e.g. UD runner

Daisy Chain Clip for CD 60x27

Assembly (channel connection)



delivery untwisted



adjust angle roughly before assembly

adjust to lower and upper C channel during assembly




bend around upper C channel during assembly

screwing to lower C channel with LN 3.5x9 mm is optional

Fields of application


- **channel connection**

connection of CD channels 60x27 (lower to upper channel)

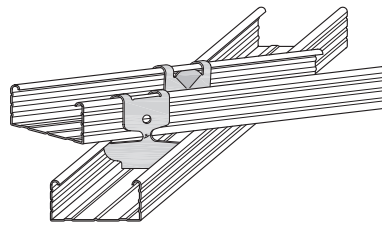

- **vertical fin**

completely factory pre-fabricated with Daisy Chain Clip and primed white




Bend over Daisy Chain Clip and screw to CD channel if necessary

Note

Daisy Chain Clip is not allowed as channel connection for ceilings with fire protection requirements

Details: Examples Vertical Fins

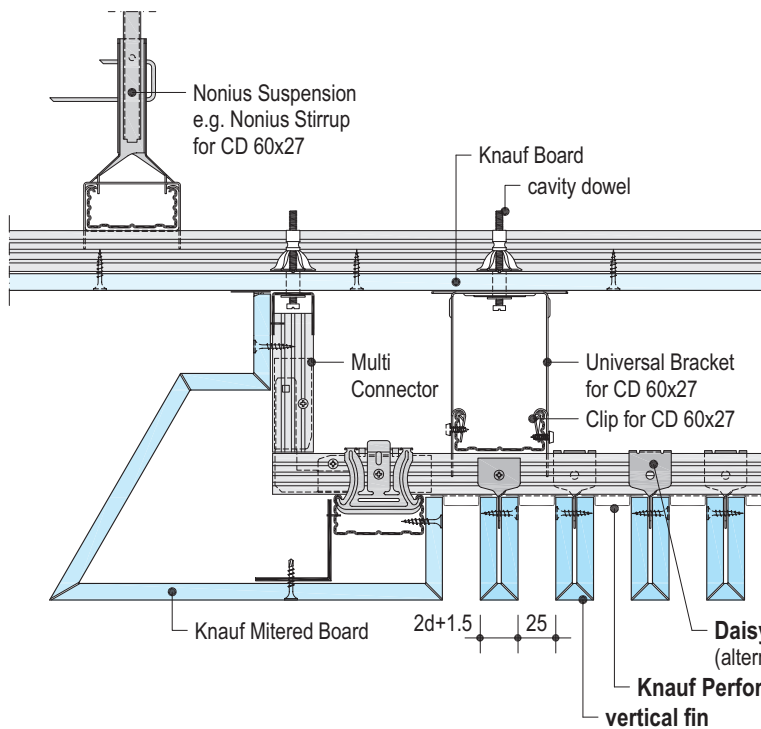

- **alternating fixing of vertical fins to CD channel**

- **first fin**


fix Daisy Chain Clip to CD channel with LN 3.5x9 mm screws

- **cross section lower / upper C channel:**

cut Daisy Chain Clip, fix to lower C channel with LN 3.5x9 mm screws

- **Knauf Perforated Acoustical Channel**

Mat.-no. 00012641
color: black
fleece: black
perforation: Ø 20 / 25





miter layout vertical fin

miter layout Knauf Mitered Board




D191-S23

Canopy with Vertical Fins

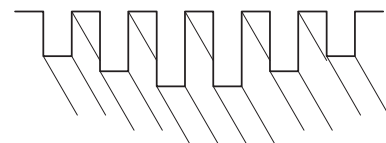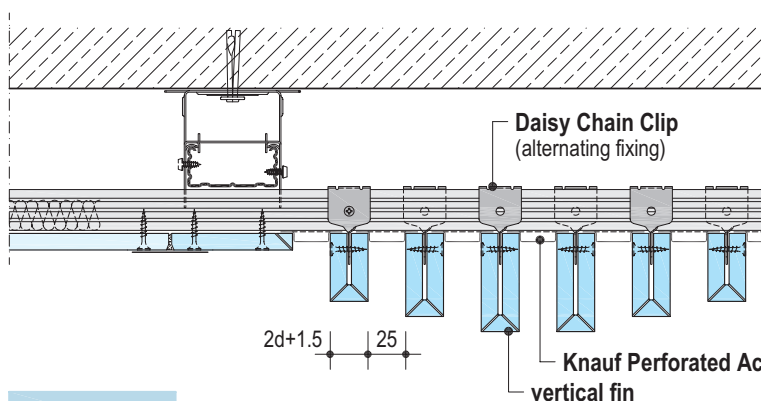












miter layout vertical fins








D191-S24

Stepped Fin Ceiling

Universal Connector for CD 60x27

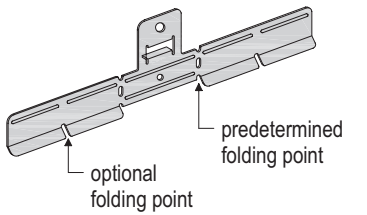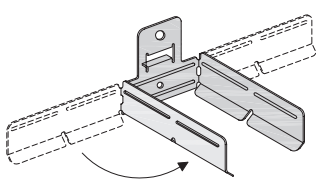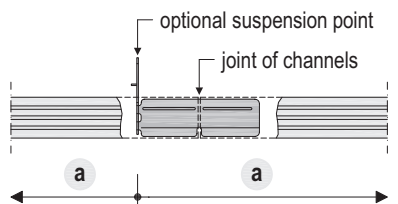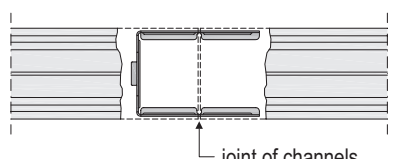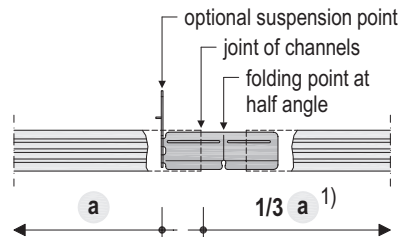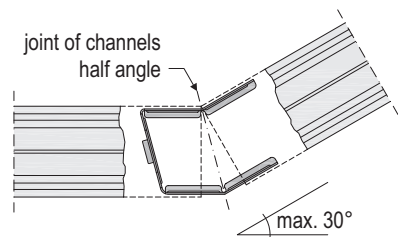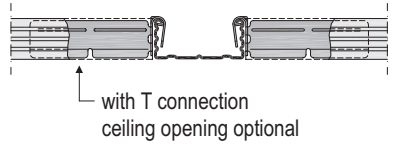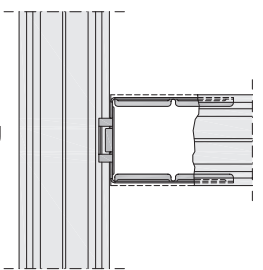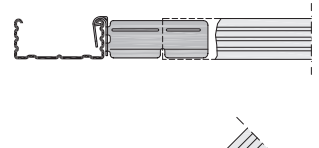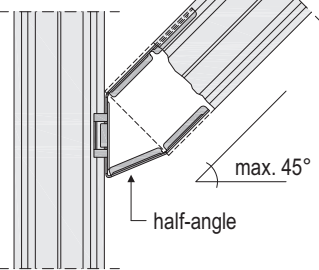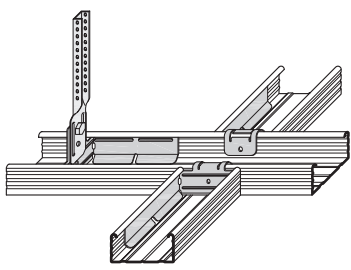Assembly	Fields of application (scheme drawings)			
<p>delivery unbent</p>  <p>adjust roughly depending on use adjust correctly during assembly</p> 	<p>• straight longitudinal connection</p>  <p>a = spacing of suspenders depending on ceiling system</p> 	<p>• longitudinal connections up to 30° *</p>  <p>1) if used as suspender</p> 	<p>• T or double T connection</p>  <p>ceiling opening optional</p> 	<p>• T connection up to 45° *</p>  <p>ceiling opening optional</p> 
				

Options for Suspensions *) (scheme drawings)

load bearing capacity class according to DIN 18168-2				
0.4 kN (40 kg)	0.4 kN (40 kg)	0.4 kN (40 kg)	0.15 kN (15 kg)	0.1 kN (10 kg)
Nonius Hanger top	slotted strip steel	direct wire	wire and cleat	directly on timber
				 <p>≥ 17 mm</p>

Note


*) Ceilings with fire protection requirements: Fix Universal Connector to CD channel 60x27 with metal screws LB 3.5x9.5 mm according to technical approval ABP P-3043/0339

Scheme Drawings

Only gypsum boards

thickness ≥ 12.5 mm


A ≤ 100 mm

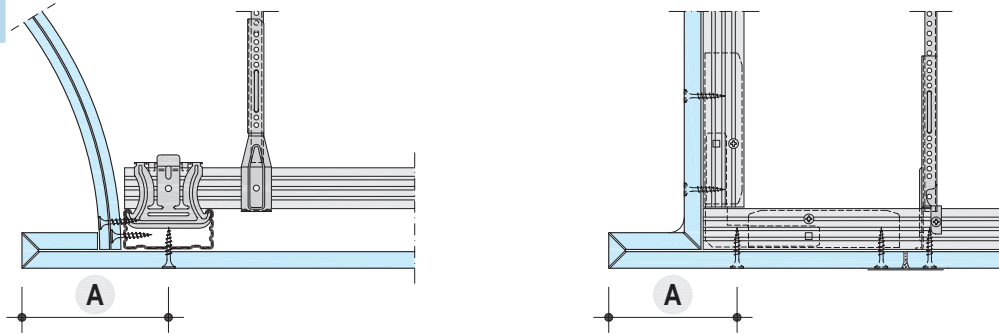

With metal angle

thickness 2 mm


B ≤ 150 mm

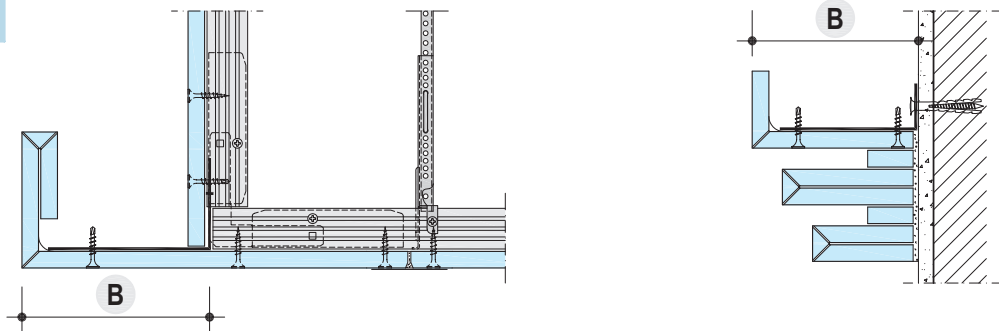

With CD channel

CD 60x27x0.6


C ca. 150 mm

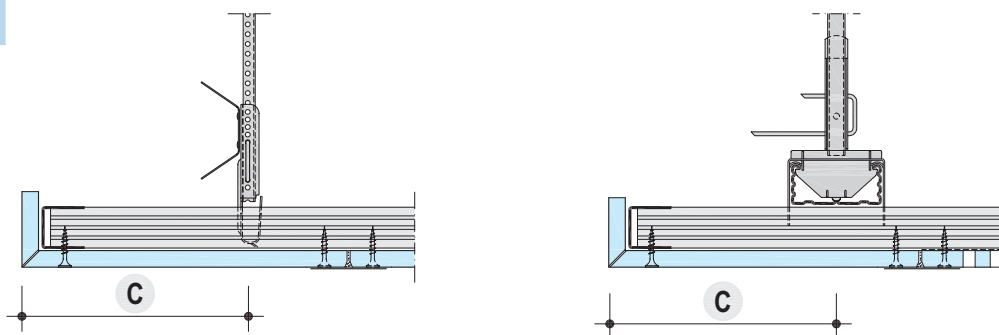

With metal cantilever

thickness 2 mm

D ≤ 200 mm

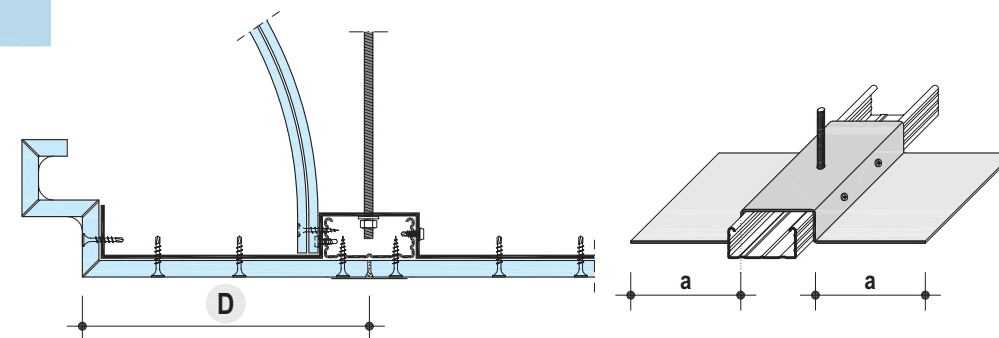


With UA channel

UA 50x40x2.0

E ≤ 300 mm

≥ 300 mm
structural analysis
necessary

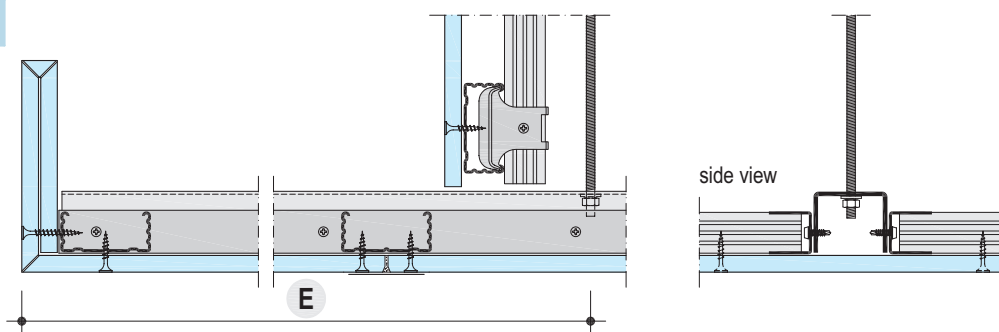

Note

For other cantilevers consult specialist

Metal angle and metal cantilever are not available at Knauf.

Specifications

Item	Description	No. of units	Unit price	Total price
.....	Ceiling lining/ suspended ceiling * DIN 18168-1, Installation height in m, suspension height in cm, anchored on reinforced concrete/ wooden beams *, spacing in cm/ steel girder, type, spacing in cm, * cladding with Knauf Boards GKB/ GKF *, Board thickness 12.5 mm/ 2 x 12.5 mm/ 25 mm *. Product/ System: Knauf Gypsum Board Ceiling D112/ D113 * m ² € €
Knauf Mitering Technology D191				
.....	Frieze as upgrade to ceiling lining/ suspended ceiling *, continuous, consisting of Knauf board strips with miters, thickness in mm, width in mm:, Installation according to drawing no. m € €
.....	Vertical Fins/ Baffle/ Protruding * consisting of Knauf Mitered Boards, board thickness: 12.5 mm/ 15 mm/ 18 mm *, including additional subconstruction, Installation according to drawing no. m € €
.....	Cornice as upgrade to ceiling lining/ suspended ceiling *, consisting of Knauf Mitered Boards, Board thickness in mm, including additional subconstruction, installation according to drawing no. m € €
.....	Wall Junction as upgrade to ceiling lining/ suspended ceiling *, sliding/ with connection joint *. m € €
.....	Split Level Ceiling as upgrade to ceiling lining/ suspended ceiling *, height difference in mm, angle 45°/ 90°/ °, * including additional subconstruction, installation according to drawing no. m € €
Knauf Molding Technology D192				
.....	Arch Elements made of Molding Boards, thickness: 12 mm/ 18 mm/ 24 mm *. angle 90°/ 180°/ ° *, radius in mm, concave/ convex *, with one side/ two side extension *, including additional subconstruction, installation according to drawing no. m € €
.....	Arch made of Knauf Boards, with parallel slotting/ molded on site *, thickness: 12.5 mm/ 2 x 12.5 mm *, angle ° *, radius:, concave/ convex *, including additional subconstruction, installation according to drawing no. m € €
.....	Barrel Vault made of Knauf Boards, molded on site, thickness in mm, angle ° *, radius:, concave *, including subconstruction consisting of bent upper CD channels, lower CD channels and rigid suspension, Installation according to drawing no. m € €
.....	Dome Ceiling made of Knauf Boards, molded on site, thickness: 12.5 mm gypsum board strips and 9.5 mm cladding, radius dome 2536 mm *, diameter 2132 mm (Berlin) / 2600 mm (München) *, rise 235 mm (Berlin) / 358.5 mm (München) *, including subconstruction, installation according to drawing no. 34502-TV/D19(Berlin) / no. 34501-TV/D19(München) *. Product/ System: Knauf Dome Berlin/ München * D193 pcs € €
* Cancel not applicable items			Sub-total €

Construction and Application, Jointing, Surface Treatment

Construction

Knauf Ceilings as ceiling lining or suspended ceiling are fixed to the basic ceiling with a rigid suspension. Knauf boards and factory or bent on site boards with parallel slotting or mitering are fixed to a metal grid of lower and upper C channels (D112) or a flush grid of C channels (D113).

Settlement joints have to be taken over into the construction of the suspended ceiling systems. Use control joints in the case of ceiling areas over approx. 15 m length, or for narrow ceiling spaces caused by a break of a wall. For strongly structured suspended ceilings additional movement joints may become necessary.

Knauf C channels are delivered galvanized. This corrosion protective coating is sufficient for indoor rooms, including bathrooms and kitchens in private housing. For other areas, e.g. under influence of outdoor air, additional corrosion protection is necessary (see DIN 18168-1 table 2).

Application

Grid

- Rigid suspension with Universal Brackets/ Nonius Hanger/ Combo Hangers/ Nonius Stirrups with Nonius Hanger Top or Anchor Hanger.
- Anchored on basic ceiling made of *Wood*: Use Knauf Drywall Screws (flathead) FN 5.1 x 35 mm (used in accordance with Construction Supervisory Permit no. Z-9.1-251)
Reinforced concrete: Knauf ceiling steel dowel (mounted in accordance with Construction Supervisory Permit no. Z-21.1-1519)
Other building materials: anchors have to be permitted and standardized for the building material being used.
- For the spacing of fixings of the suspenders on the basic ceiling and the spacing of channels

see tables D112/ D113 (TDS D11 Knauf Platendecken). For Apertura Board Ceilings see TDS D12 (Knauf Acoustical Ceiling Systems).

- Connect upper C channels with hangers and align them at the required suspension height. Connect lower C channels CD 60/27 to upper C channels with: Intersection Connectors, Clip for CD 60x27 or Daisy Chain Clip. Other channel connectors: Multi Connector or Universal Connector 60/27.

Cladding

Cross mounting of Knauf boards to lower C channels, displacement of jointings at least 400 mm ensuring that end joints bear on C channels. Start fastening of Knauf boards either in the middle or at a corner in order to prevent up-setting deformation.

Press boards firmly on to the grid during screw attachment.

Additional loads

- Single loads applied directly to the cladding must not exceed 0,06 kN per spacing of lower channels and meter.
- Apart from that, additional loads have to be considered for the calculation of the dead load of the suspended ceiling if they are borne by the ceilings subconstruction. The loads are to be included when determining the load class from the table on page 2 of TDS D11.
- Other additional loads have to be applied directly to the basic ceiling.

Knauf Drywall Screws for the fixing of Knauf boards onto metal channels with a thickness of d = 0.6 mm

Thickness of boards	Knauf Drywall Screws (DIN 18182-2)	Spacing of screws (DIN 18181)
up to 15 mm	TN 3.5 x 25 mm	170 mm
18 to 25 mm	TN 3.5 x 35 mm	170 mm
2 x 12.5 mm	TN 3.5 x 25 mm + TN 3.5 x 35 mm	170 mm

Jointing

Fill in joints with Knauf Uniflott without using tape. If using tape, fill in with Knauf Fugenfüller Leicht or with Ames machine and Knauf Joint-filler-Super.

Cover all screw heads as well. For double layer cladding, fill in joints of first layer, smooth joints of second layer.

Recommendation: Fill in and tape cut edges of visible layers no matter which filling material is used.

Filling and covering of joints should only take place after the boards have been allowed to rest in the given humidity and temperature zones, and no more longitudinal changes can be expected, i.e. expansion or contraction. Joints should be filled at a minimum temperature of 10°C. In case of mastic asphalt screed, fill in joints after screed has been applied.

Surface Treatment

Use a primer on Knauf Boards before coating or painting them. Ensure that the primer and the coat or paint are compatible. The following coats can be used to cover Knauf Boards:

- Coats: Washable and abrasion-proof emulsion paint, multicolored (rainbow) emulsion, oil paint, matte-finish lacquer, alkyd resin paint, polymer resin paint, PUR lacquer, or epoxy-based lacquer, according to intended use or as required.
- Wall Papers: paper-, textile and synthetic wall papers. Use only adhesives made of cellulose according to „Merkblatt Nr. 16, Technische Richtlinien für Tapezier- und Klebearbeiten“, Frankfurt/Main 2002, released by Bundesausschuss Farbe und Sachwertschutz.
After wallpapering of paper and fiber glass

wallpapers quick drying must be assured through adequate airing.

- Alkaline coats such as lime, water glass colors and silicate-based paints are unsuitable for gypsum board surfaces.
- Silicate-based emulsion paints may be used after referring to the manufacturer's recommendations and following the stipulated guidelines closely.
Gypsum board surfaces that have constantly been exposed to light without any protection can develop yellowing agents that show up despite a coat of paint. Therefore a trial coat is recommended that will extend across several boards including all joints. Yellowing can, however, be successfully avoided only by using a special shielding primer.

Knauf Know-how: The shown solutions are proposals for independent and extraordinary conceptions. Factory-molded elements increasingly show up as the most cost-effective solution in implementation. Make use of our technical know-how and professional CAD Service for detailed design. We accompany you from the beginning of your conception up to the implementation. Our **Call Center for Technical Information** will gladly name a contact person on location.

Knauf Direkt ☎ **Call Center for Technical Information**, Phone 0 18 05 / 31-10 00, Facsimile 0 18 05 / 31-40 00
Knauf websites: www.knauf.de, www.knauf.com, **e-mail:** knauf-direkt@knauf.de
Knauf Headquarters, Am Bahnhof 7, D-97346 Iphofen, Phone +49 93 23 / 31-0, Facsimile +49 93 23 / 31-277



All technical changes reserved. Only the current printed instructions are valid. Our warranty is expressly limited to our products in flawless condition. All application quantities and delivery amounts are based on empirical data that are not easily transferable to other deviating areas. All rights reserved. All amendments, reprints and photocopies, including those of excerpts, require the express permission of Knauf Gips KG, Am Bahnhof 7, 97346 Iphofen, Germany.